
NOBILI

mx

Elevatori a forche portati TRIPLEX

TRIPLEX tractor mounted fork-lifts




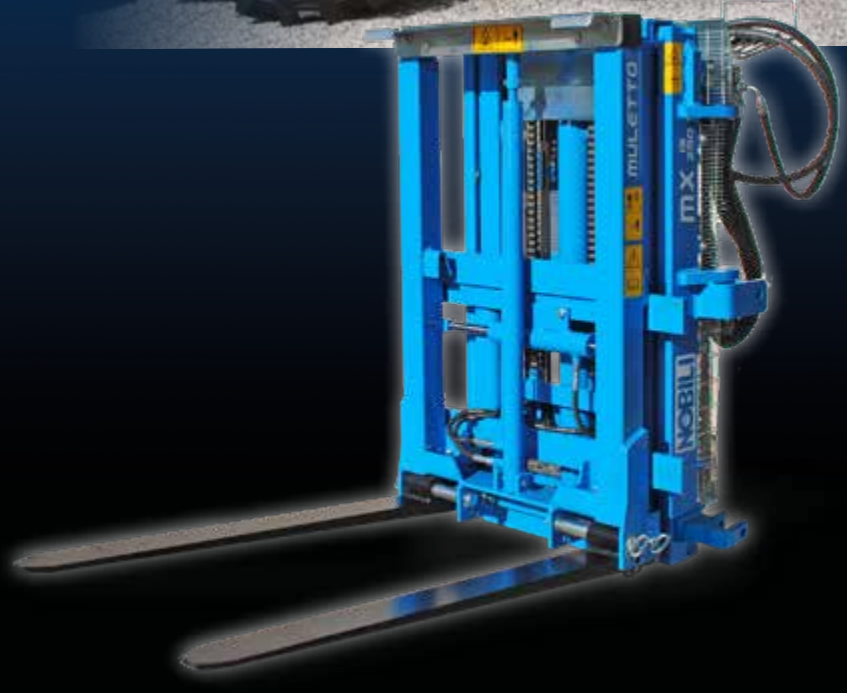

mx

La forza di sollevare, la precisione di movimentare.

Gli elevatori a forche portati della serie MX sono attrezzature portate applicabili ai tre punti del sollevatore anteriore o posteriore del trattore. La particolare progettazione dei montanti in acciaio ad alta resistenza scorrevoli su cuscinetti consente un ingombro ridotto, mantenendo un'alzata libera di 200 mm. Gli elevatori MX hanno di serie una portata di 1500 kg e un distributore a 4 leve che consente i movimenti di elevazione, traslazione laterale, brandeggio e stringicasse. A richiesta si possono montare la traversa o il cappello stringicasse e i comandi elettrici per soddisfare le varie esigenze di lavoro.

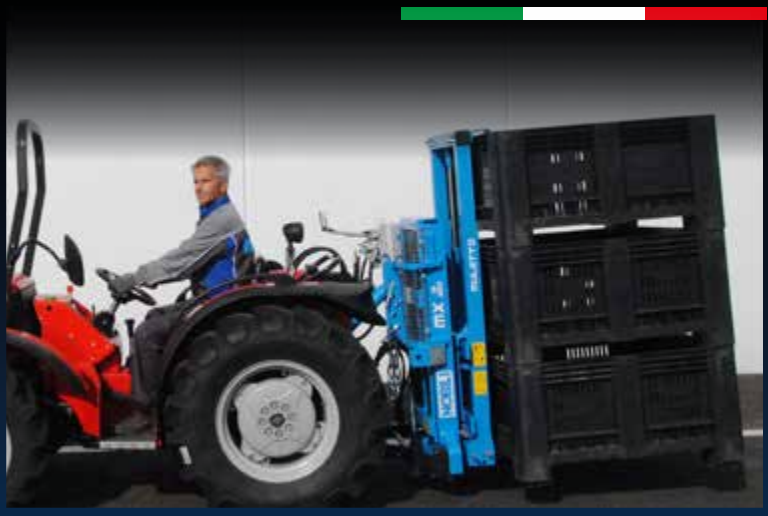

The power to lift, the precision to move.

MX tractor mounted fork-lifts can be fitted to the front or rear three-point linkage of the tractor. The special design of the frame with pillars made in high resistance steel and sliding on bearings enables a compact size, maintaining a free lift of 200 mm. MX fork-lifts have a standard lifting capacity of 1500 kg and a 4-lever distributor that allows the lifting, side-shift, tilt and load locking movements. Upon request it is possible to equip the fork-lift with the crossbar or the case holder and the electric controls to satisfy different working needs.



Montanti in profilato di acciaio speciale e movimenti su cuscinetti a sfera
Frame pillars of special steel profile and movements on a ball bearings



Distributore meccanico
Mechanical distributor

Modelli - Models		MX 15-250	MX 15-320
Portata - Lift capacity	kg	1500	1500
Alzata libera - Free lift	mm	200	200
Elevazione Lifting	mm	2500	3200
Altezza minima Minimum height	mm	1447	1859
Brandeggio Tilt	mm	-10°/+15°	-10°/+15°
Apertura min-max (Stringi-Bins) Opening min-max (Crossbeam)	min mm	1148	1448
	max mm	1938	2542
Apertura min-max (Cappello) Opening min-max (Cap)	min mm	1018	1318
	max mm	1808	2412
Traslazione laterale Side movement	mm	100+100	100+100
Larghezza forche Fork width	mm	540-740	540-740
Potenza Power	HP	40-50	40-50
	kW	30-37	30-37
Peso (full optional) Weight (full optional)	Kg/Lbs	500/1102	550/1213

www.nobili.com • info@nobili.com
NOBILI S.p.A. - Via Circonvallazione Sud, 46 - 40062 MOLINELLA (BO) - tel. +39 051 881444

10/2026